Loop RS

Reset form

CRASH TESTED ISO 7176-19

Tiltable wheelchair for an optimized positioning, suitable for adolescents and adults

Included in the base price:

- grows with the patient (SW by max. 4cm, SD + 2cm and with equipment by + 4cm, BH by max. 5 cm), purchased parts may be necessary (depending on configuration)
- seat tilt function from -3° up to +35°
- pneumatic or solid tyres
- rigid frame with 10 cm abduction
- for active and passive use
- back angle adjustment from 80° to 120°, completely stowable
- standard knee lever brake

☐ **Quotation**
☐ **Order**

German aid index N°. 18.50.03.2001
Weight capacity: 120 kg

Base price 3.595,- €
Prices excl. VAT,
valid from 01.01.2026 and until further notice.

Delivery address / Company stamp:		Billing address: ☐ same as delivery address	
Name:		Name:	
Address:		Address:	

Ordering information:			
Reference/ internal description:		Date:	
Contact person:		Signature:	

Frame measures

Seat width (10..)	Seat depth (11..)	Back height	Lower leg length
+ 4 cm extension each ☐ 30 ☐ 32 ☐ 34 ☐ 36 ☐ 38 ☐ 40 ☐ 42 ☐ 44 ☐ 46 ☐ 48	+ 2 cm extension each *(optionally with another 3 cm growing)* ☐ 30 ☐ 32 ☐ 34 ☐ 36 ☐ 38 ☐ 40 ☐ 42 ☐ 44 ☐ 46 ☐ 48	*Please specify the back height when selecting the back system on page 3.*	*Please specify the lower leg length and the distance from the upper edge of the seat to the upper edge of the footrest in the legrest configuration on page 5.*

Frame equipment

Child-proof lock	Additional gas pressure spring	Rigid (welded) frame
☐ Child-proof lock for tilting mechanism. **Recommended for very active children**	☐ Necessary from a user weight > 75 kg or from seat width 42. **Available from frame width 36**	☐ for increased Torsional stiffness **This frame does not expand as seat width increases.**
N° 1940 69,- €	N° 192501 410,- €	N° 597695 435,- €

Frame arches for closed frame

increases frame stability	
☐ Frame arches for a closed frame. The frame arches will be coated in the frame colour. **Increases the stability of the frame**	
N° 597699 CPD 389,- €	

Frame colours

Frame colours STANDARD				Frame colours PREMIUM			
☐ **Traffic white** | matt | RAL 9016		N° 151101	0,- €	☐ **Orange** | sparkle		N° 151201	50,- €
☐ **Titanium silver** | matt		N° 151102		☐ **Deep red** | sparkle		N° 151202	
☐ **Pearl dark grey** | matt | RAL 9023		N° 151103		☐ **Red violet** | sparkle		N° 151203	
☐ **Shootingstar grey** | matt		N° 151104		☐ **Blue violet** | sparkle		N° 151204	
☐ **Anthracite grey** | matt | RAL 7016		N° 151105		☐ **Royal blue** | sparkle		N° 151205	
☐ **Coarse black** | matt		N° 151106		☐ **Leprechaun green** | sparkle		N° 151206	
☐ **Jet black** | matt | RAL 9005		N° 151107		☐ **Pastel yellow** | matt | RAL 1034		N° 151301	
☐ **Canola yellow** | shiny | RAL 1021		N° 151001		☐ **Orient red** | matt | RAL 3031		N° 151302	
☐ **Pure red** | shiny | RAL 3028		N° 151002		☐ **Pastel violet** | matt | RAL 4009		N° 151303	
☐ **Heather violet** | shiny | RAL 4003		N° 151003		☐ **Pastel blue** | matt | RAL 5024		N° 151304	
☐ **Traffic purple** | shiny | RAL 4006		N° 151004		☐ **Pastel green** | matt | RAL 6019		N° 151305	
☐ **Capri blue** | shiny | RAL 5019		N° 151005		☐ **Pastel turquoise** | matt | RAL 6034		N° 151306	
☐ **Water blue** | shiny | RAL 5021		N° 151006					
☐ **Emerald green** | shiny | RAL 6001		N° 151007					

Anodisation Design Package

Coating of certain parts in anodised colour			
☐ Anodised blue		N° 157301	295,- €
☐ Anodised red		N° 157302	
☐ Anodised green		N° 157303	
☐ Anodised gold orange		N° 157304	
☐ Anodised violet		N° 157305	

The following parts are anodised:
Assembly group caster (fork, caps, adapter, half shells, wheel spacer), profile pipe support for push bow, handrims. **The design package is only available in the listed configuration.**

Restrictions: Anodised design handrims are only included in the design package with aluminum handrims. *Not posssible with stainless steel, Maxgrepp, PVC, double, nob or ergonomic handrims. Also not possible with wheels with profile handrims. Profile pipe support is only available in the design package anodised by choosing push bow.*

To see the latest versions of our order forms, please visit www.sorgrollstuhltechnik.de/download-portal

Example **STANDARD back system**

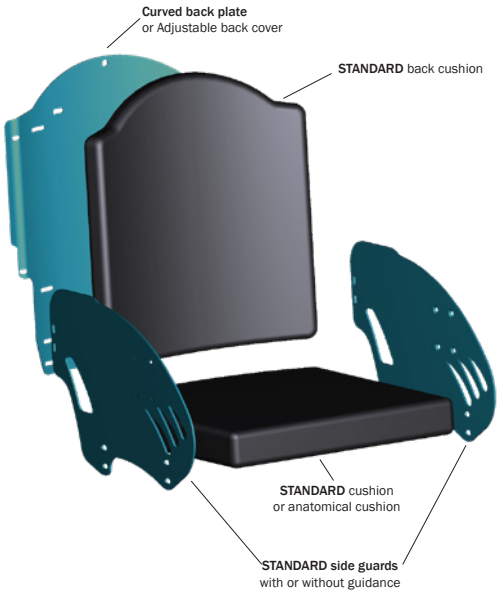

Example **ERGO backsystem**

„The offered ERGO system for Loop BS allows an effective positioning in the pelvis and back area. The resulting sitting stability and support en able a physiologically relaxed posture. The ERGO system combines an ergonomic back support with integrated body support and a functional, stable seat with extended side support.“

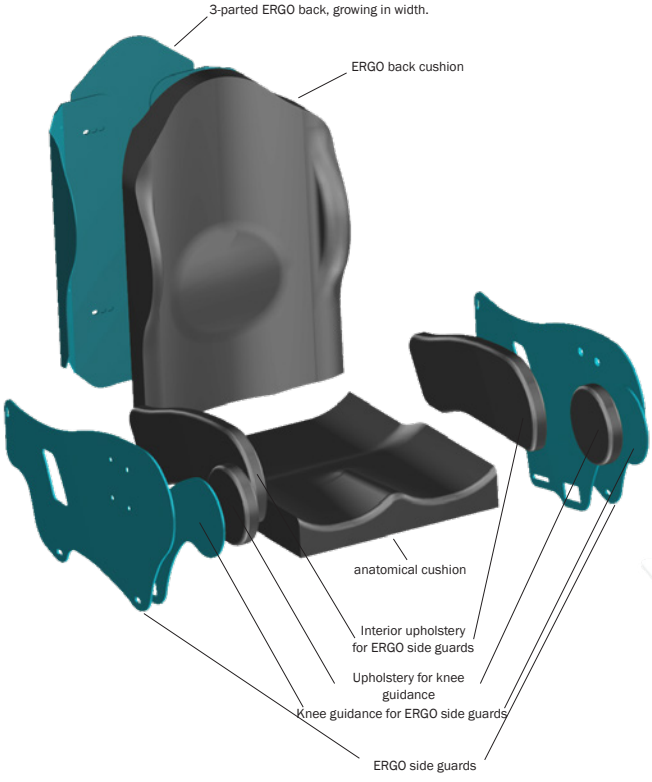

To see the latest versions of our order forms, please visit www.sorgrollstuhltechnik.de/download-portal

Two different equipment variants:

The variants can NOT be combined with each other

the STANDARD back system

or

the ERGO system

Back height standard (+ 5 cm extension each)

N° 12 .. 3: ☐ 30 ☐ 35 ☐ 40 ☐ 45 ☐ 50

Curved back plate Model 1

Curved back plate, BH+2 cm; cavity:
☐ 30 mm (..030)
☐ 50 mm (..050)

N° 693... **315,- €**

Curved back plate Model 3

Curved back plate, BH+5 cm; cavity:
☐ 30 mm (..330)
☐ 50 mm (..350)



N° 693... **399,- €**

Back extension for curved back plate

☐ Back extension up to 17.5 cm, retractable, with detachable pad for head; weight reduction in comparison to a head rest approx. 1000 g

Only in combination with curved back plate.
Not possible with head rest (N° 6861..).
Not approved as a headrest for motor vehicle transport.

N° 686069 **299,- €**

Restrictions back extension

Model 1:
only from BH 35 cm

Model 3:
only from BH30 with BH+5 cm

Back cover

adjustable

☐ **Adjustable cover** with strap system, **incl. back cushion** (thickness 2 cm)

Choice of cover colour on page 4

N° 6701.. **255,- €**

Fitting set

for solid back

☐ one set of clamps, required for mounting a solid back that is manufactured by the trade specialist



N° 692598 **175,- €**

Connection

for back shell

☐ Back shell connection, black, can be clamped to the stabilizer bar



N° 696402 **88,- €**

Back cushion

WITHOUT back cushion

☐ **No back cushion** (please tick if no cushion is required)

Standard cushion for Curved back plate

☐ Standard cushion **for curved back plate,** 3 cm thick, with zipper, breathable cover
Selection cover colour on page 4

N° 8517 **175,- €**

Additional cover

☐ Additional cover for **Standard cushion (as chosen left)**

N° 8501 **85,- €**

Side guards standard

Side guards standard

☐ screwed aluminum side guards

N° 4527 **200,- €/P**

Side guards with guidance

☐ screwed aluminum side guards with thigh guidance

N° 4528 **220,- €/P**

Back height ERGO (+ 5 cm extension each)

N° 12 .. 3: ☐ 40 ☐ 45 ☐ 50 ☐ 55 ☐ 60

ERGO back

☐ ***3-parted solid back unit for ERGO-System, growable in width.***

without cushion



N° 698000 **540,- €**

ERGO back cushion

☐ Anatomically shaped back cushion for ERGO back (in the middle about 3 cm thick), *with lateral support and slight lumbar support.*
incl. cover, choose cover colour on page 4

N° 891200 **CPD 740,- €**

Cover ERGO back cushion

☐ **ADDITIONAL** cover for **ERGO back cushion**

N° 891201 **230,- €**

☐ **WITHOUT** cover for **ERGO back cushion**

N° 998912 **./. 120,- €**

Side guards for ERGO system

ERGO side guards

☐ Aluminum side guards with high thigh guidance

suitable for interior upholstery and mounting knee guidance

N° 4529 **290,- €/P**

Interior upholstery

☐ for Ergo side guards with 2.5 cm thickness

Choosing side upholstery reduces the selected seat width by 5 cm

Recommended with anatomical cushion N° 891002

Choice of cover colour on page 4

N° 452905 **CPD 176,- €/P**

Knee guidance

☐ or ERGO side guard, screwed aluminum knee guidance

N° 452909 **130,- €/P**

Upholstery f. knee guidance

☐ Upholstery for knee guidance, cover colour like interior upholstery ERGO side guards.
Recommended with interior upholstery ERGO side guards N° 452905



N° 452910 **130,- €/P**

Raw delivery

Raw delivery

☐ **of the following components** *(if selected):*
ERGO back, ERGO side guards, ERGO knee guidance holder.

N° 999950 **0,- €**

Subsequent coating

☐ **in chosen frame colour.**
Components (if selected):
ERGO back, ERGO side guards, ERGO knee guidance holder.

N° 999915 **220,- €**

To see the latest versions of our order forms, please visit www.sorgrollstuhltechnik.de/download-portal

Back angle adjustment

If the user has movement disorders (e.g. spasticity or similar), we recommend the back angle adjustment with gas pressure spring (No. 6180).

through raster	through gas pressure spring
☐ Mechanically adjustable through raster from 90°-120°, completely stowable, incl. stabilizer bar **Attention! Anti-tipper required (danger of tipping!)**	☐ Steplessly adjustable in angle through gas pressure spring from 90°-117°, incl. stabilizer bar. ***Only possible from BH 35cm.*** ***Attention! Anti-tipper required (danger of tipping!).*** ***Restrictions in the angle of the bracket are possible depending on the seat height, see page 4.***
N°6124 **0,- €**	N°6180 **539,- €**

Seat system

Seat plate

☒ Firm aluminum seat plate for optimized support of pelvic, firmly bolted

N°1933 **0,- €**

Seat extension

☐ **Seat depth extension (1 - 3 cm)**

N°193301 **118,- €**

Arm rest

Arm pad 240x50 mm

☐ Armrests, with height and angle adjustable arm pads **240 x 50 mm**, PU

N° 453200 **260,- €/P**

Arm pad 260x80 mm

☐ Armrests, with height, angle and depth adjustable arm pads **260 x 80 mm**, PU

Arm pads are adjustable in depth by +90 mm

N° 453302 **338,- €/P**

Seat cushion (all covers with zippers and changeable)

	Standard cushion	Anatomical cushion	Cushion without cover	Incontinence cover
☐ **No seat cushion** (please tick if no cushion is required)	Synthetic foam for firm and comfortable seating ☐ 3 cm (..03) ☐ 5 cm (..05)	☐ Anatomically formed, with slight abduction, changeable cover, thickness of cushion measured at slightest point: front 5 cm, back 3 cm	☐ Seat cushion as chosen, **without cover**	☐ For **standard cushion** as chosen on the left
N° 998002	N° 80.. **105,- €**	N° 891002 **CPD 489,- €**		N° 86.. **105,- €**
☐ **Additional cover** for cushion as chosen on the right	Pressure relief cushion for medium-soft seating ☐ 3 cm (..03) ☐ 5 cm (..05)	☐ **Additional cover** for anatomical cushion as configurated		☐ For **anatomical cushion** as chosen on the left
N° 8201 **90,- €**	N° 81.. **135,- €**	N° 891003 **CPD 199,- €**	N° 998001 **./. 30,- €**	N° 891004 **CPD 199,- €**

Choice of Trevira cover colour

Note: Colour views may differ from reality depending on the screen view / printout and are only for initial orientation.

Please choose the colour of the selected covers:

☐ black (30) ☐ grey (31) ☐ nightblue (32) ☐ ultramarine blue (33) ☐ petrol (34) ☐ applegreen (35) ☐ burgundy (36) ☐ red (37) ☐ pink (38)



N° 80.. (seat cushion/anat. cushion) / N°85.. (back cushion/anat. back cushion) / N°4582.. (side upholstery)

To see the latest versions of our order forms, please visit www.sorgrollstuhltechnik.de/download-portal

Push bow

Extendable push bow

☐ Extendable push bow, extendable by 20 cm, adjustable in angle 307 °

made of metal

N° 653101 **0,- €**

Brakes

Knee lever brakes		Article-N°	Price
☐ Knee lever brake **Standard**		N°3525	**0,- €**
☐ Knee lever brake **lockable in activated or deactivated position**		N°3513	**198,- €/P**
☐ Knee lever brake **Pull-to-lock** (Pull brake) **„Pull-to-Lock brakes by pulling“**		N°3529	**80,- €/P**
Knee lever brake as **Single hand brake**	☐ Mounting left	N°350901	**346,- €/P**
	☐ Mounting right	N°350902	
Knee lever brake (variant see below) **with included rollback prevention.** **Delays rolling backwards on inclines without impairing forward travel.** **Recommended with pneumatic tyres.**			
☐ Based on **Knee lever brake Standard**		N°352600	**190,- € /P**
☐ Based on **Knee lever brake Lockable in activated or deactivated position**		N°352601	**330,- € /P**
☐ Based on **Knee lever brake Pull to lock**		N°352602	**250,- € /P**

Brakes with companion function

Locking brake	Article-N°	Price
☐ **Knee lever brake, can also be operated by an attendant using a bowden cable** Cannot be combined with all other brakes listed. Not with short handle	N°352100	**330,- €**
☐ **Parking brake at the front of the frame, can only be operated by the attendant using a bowden cable** Cannot be combined with all other brakes listed. Not with short handle	N°352102	**330,- €**

Drum brake	Article-N°	Price
☐ **Hub service brake** for Standard, profile handrim and lightweight wheels **Including brake lever for the attendant**	N°220036	**330,- €**

Brake lever extensions

Straight (6cm length)	Article-N°	Price
☐ Brake lever extension **with top cover**, 6cm length	N°351001	**62,- €/P**
☐ Brake lever extension **with ball knob**, 6cm length	N°351002	**78,- €/P**
☐ Brake lever extension **with golf ball knob**, 6cm length	N°351003	**78,- €/P**

To see the latest versions of our order forms, please visit www.sorgrollstuhltechnik.de/download-portal

Abbreviations:
piece - pcs | seat width - SW | lower leg length - LLL
pair - P | seat depth - SD | customized product discount - CPD
Trade discount - TD | back height - BH | Additional charge - AC
configuration - cf.

Specificaton of **lower leg length (LLL) / Cushion thickness / Distance**

Specify: **Lower leg length (LLL)** | - | Specify: **Cushion thickness** | = | Result: **Wheelchair dimensions** Distance upper edghe of the seat and the upper edge of the footplate - Cushion thickness

All measurements in cm



Lower leg length:
Specification of the distance in cm between the hollow of the knee and the sole of the foot at a 90° knee position angle

Thickness seat cushion:
Indication of the thickness of the planned seat cushion

Wheelchair Dimensions:
Distance from the upper edge of the seat to the upper edge of the footrest in cm (without taking into account the thickness of the seat cushion). *From your information regarding the lower leg length and thickness of the seat cushion, we calculate the distance from the top edge of the seat to the top edge of the footrest and mount this on the leg support you have chosen.*

Example:
Your information: *LLL = 38 cm, seat cushion thickness = 5 cm*
Manufacturer assembly: *In this example, SORG mounts the footrest at a distance of 33 cm from the footrest.*

Leg support **foot plate depth 150 mm and 230 mm**

Standard foot plate undivided

Undivided foot plate, foldable backwards, rigid knee angle at 90°

Possible distance top edge seat to top edge footplate: 13-49 cm

Article name	Article-N°	Price
☐ Foot plate depth 150mm	N° 405501	**0,- €**
☐ Foot plate depth 230mm	N° 405502	**60,- €**

Adjustable in angle foot plate undivided

Undivided foot plate, foldable backwards, knee angle adjustable from 80-180

Possible distance top edge seat to top edge footplate: 12-50 cm

Article name	Article-N°	Price
☐ Foot plate depth 150mm	N° 405503	**90,- €**
☐ Foot plate depth 230mm	N° 405504	**150,- €**

Adjustable in angle foot plate divided

Divided foot plates, foldable backwards, knee angle adjustable from 80-180°

Possible distance top edge seat to top edge footplate: 12-50 cm

Article name	Article-N°	Price
☐ Foot plate depth 150mm	N° 405530	**135,- €**
☐ Foot plate depth 230mm	N° 405531	**195,- €**

Width adjustable foot plate
Width adjustable by up to 80 mm (depending on model and configuration)

Surcharge item for the above mentioned legrests.

☐ Continuous foot plate, depth 230 mm, Offers the option of setting the maximum usable width individually.
- **Only in combination with N ° 405502 and 405504**
- **Not in combination with heel edge**

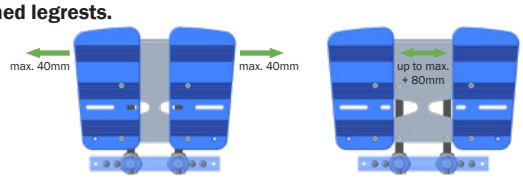

N° 405514 **AC 175,- €**

Leg support
All removable leg supports can be adjusted in width and are possible from frame size 2 and a seat depth of 40 cm. Not possible in combination with 'frame arches for closed frames'.

Foot plate depth 150 mm. Footplate depth 230 mm available on request in customised solution.

Leg Support Genex

Undivided

☐ with undivided foot plate, foldable sidewards, leg support completely removable, swiveling outwards and adjustable in width.

Possible distance top edge seat to top edge footplate: 26-45 cm

N° 405507 **175,- €**

Divided

☐ with divided foot plates, foldable sidewards, leg support completely removable, swiveling outwards and adjustable in width.

Possible distance top edge seat to top edge footplate: 26-45 cm

N° 405540 **265,- €**

Articulating

Leg rest can be swivelled upwards, swivelled outwards, removable, divided foot plates

a) Possible distance from top of seat to top of footplate 23,5 to 39,5cm
b) Knee angle range (0° to 80°)
c) Distance pivot point to seat plate 126mm

☐ with **TELESCOPIC adjustment**



N° 403751 **390,- €**

☐ with **GAS PRESSURE SPRING adjustment**



N° 403761 **490,- €**

Dynamic Leg support

☐ Special spring mechanism to soothe spasticity or leg tone in all dimensions, foot plate hinged upwards. Knee angle resilient forward and backward.

Possible from SD 40cm.
Possible distance top edge seat to top edge footplate: 26-41 cm.



Not in combination with N°4009 / N°405509
Maximum adjustable distance = seat height - 13 cm. Maximum distance 41 cm. The selected seat height must be at least 13 cm greater than the specified distance (seat - footplate).

N° 4053 **815,- €**

Leg support options

Locking at 90°

☐ for all leg supports with foldable foot plate/s

N° 4009 **67,- €**

☐ **for leg support (N°405507) only**

Heel edge

☐ for all leg supports with foldable foot plate/s

N° 405509 **75,- €**

Elevation set

☐ Elevation set for leg rest Articulating, by + 45mm (for N°403751 + 403761)

N° 403715 **80,- €**

Heel cups

Heel cups, aluminum black for mounting on foot plate

☐ size 1 12,5 x 8 cm (..31)
☐ size 2 14,5 x 10 cm (..32)
☐ size 3 16,5 x 12 cm (..33)

N° 4020.. **100,- €/P**

Belts for heel cups

☐ Matching belts to the selected heel cups (N°4020..)

N° 402015 **120,- €/P**

Calf rest (with holder)

☐ Calf pad flat, continuous, for leg rests N°405501/02, 405503/04. Thickness approx. 2 cm with nylon cover, black.	N° 403009	**249,- €**
Calf pad flat, divided, for leg rests N°405530/31. Thickness approx. 2 cm with nylon cover, black. Mounting seen from the user: ☐ left ☐ right ☐ left and right (2 pcs)	N° 403108	**149,- €/ pcs**
Calf pad PU, black, divided, for the leg rests N°403751/61 Mounting seen from the user: ☐ left ☐ right ☐ left and right (2 pcs)	N° 403010	**99,- €/ pcs**

[1] Single hand brake not possible in combination with outwards swiveling leg support.

To see the latest versions of our order forms, please visit www.sorgrollstuhltechnik.de/download-portal

Abbreviations:
piece - pcs | seat width - SW | lower leg length - LLL
pair - P | seat depth - SD | customized product discount - CPD
Trade discount - TD | back height - BH | Additional charge - AC
configuration - cf.

Seat height

Please choose your seat height

Rear wheel	Seat depth	Seat heights (in cm) 41	43,5	46	48	48,5	50	50,5	51	52,5	53	53,5	55	55,5
12" Solid			☐	☐	☐									
12" Pneumatic				☐	☐		☐							
16"				☐	☐		☐							
20"	SD 30-40	☐	☐	☐	☐		☐							
	SD 42-48		☐	☐		☐		☐						
22"	SD 30-40		☐	☐		☐		☐		☐				
	SD 42-48			☐		☐			☐		☐			
24"	SD 30-40			☐		☐			☐		☐		☐	
	SD 42-48					☐			☐			☐		☐
possible caster wheel sizes		5"	5"-5,5"	5"-6"	5"-7"	5"-7"	5"-7"	5"-7"	5"-7"	6"-7"	6"-7"	6"-7"	7"	7"

= Recommended because there is no conflict (reduced angle of tilting) between armrests and wheel cover.

= Not possible.

= Not in combination with back angle adjustment by gas pressure spring (Article-N°. 6180), but ther is no conflict between between armrests and wheel cover.

= Possible, but due to conflict armrests / wheel cover the entire tilting angle is not available.

Wheel size and wheel camber

Wheel size

Size in inches:

☐ 20“
☐ 22“
☐ 24“

0,- €

Camber

Camber
☐ 2° (Standard)

0,- €

Adapter for camber 0°
☐ 0°
Not with double handrim with drum brake hub N°2615

N° 201515 **80,- €**

Wheel cover for rear wheels

Long

☐ **Wheel cover long for 20“, 22“ und 24“**

N° 5210 **230,- €/P**

Short

☐ **Wheel cover short for 16“, 20“, 22“ und 24“**

N° 5211 **228,- €/P**

Rear wheels 20“-24“

Rear wheel Standard

☐ All-round wheel, silver

Additional weight of approx. 500g/ wheel compared to lightweight wheels

N° 21..30 **0,- €**

Rear wheel with profile handrim

Only with 22“ and 24“

☐ Standard wheel, silver, with, closed, rubberized, black handrim grip profile. Unity of rim and hand-rim, reduces the risk of injury to the fingers.

Additional weight compared to light-weight wheels: approx. 1400g per pair.

Additional weight compared to standard wheels: approx. 900g per pair.

N° 21..32 **98,- €/P**

Lightweight wheel with STANDARD hub

☐ **with standard hub,**
Very lightweight, black, incl. aluminum handrim

Weight reduction of approx. 500g/pair compared to standard wheels

THE STANDARD HUB IS INCOMPATIBLE WITH THE DRUM BRAKE (N° 220036)!

N° 21..76 **160,- €/P**

Lightweight wheel with DRUM BRAKE hub

☐ **with drum brake hub,**
black, incl. aluminum handrim

Only in combination with drum brake N° 220036 (mind additional charge)

Weight reduction of up to 1.1 kg/pair compared to standard drum brake wheels

Package price for lightweight wheels incl. drum brakes and brake lever for the attendant 460,- €/pair

N° 21..81 **130,- €/P**

Tyres

Title		Article-N°	Price
☐ Pneumatic Standard „Right Run“ **1“**	1	N°20..13	**0,- €**
☐ Pneumatic Standard **1 3/8“**	2	N°20..21	**0,- €**
☐ Pneumatic Performance „Marathon Plus“ **1“** Only for 22“ und 24“ wheels	3	N°20..12	**78,- €/P**
☐ Solid standard tyres **1“**	4	N°23..11	**0,- €**
☐ Solid standard tyres **1 3/8“** 1 3/8“ tyres *not possible with lightweight wheels*	5	N°23..21	**0,- €**

Examples:

Rear wheels 12“ and 16“ (instead of drive wheels, spoke guard not possible)

12“-wheels (Solid tires)

☐ **12“-wheels** with **solid** tires and **standard hub**

N°211240 **0,- €**

☐ **12“-wheels** with **solid** tires and **drum brake hub**

N°221240 **0,- €**

12“-wheels (Pneumatic tires)

☐ **12“-wheels** with **pneumatic** tires and **standard hub**

N°211200 **0,- €**

☐ **12“-wheels** with **pneumatic** tires and **drum brake hub**

N°221200 **0,- €**

16“-wheels (only available with drum brake hub)

☐ **16“-wheels** with **solid** tires and **drum brake hub**

N° 221640 **98,- €/P**

☐ **16“-wheels** with **pneumatic** tires and **drum brake hub**

N° 221600 **98,- €/P**



Similar pictures

To see the latest versions of our order forms, please visit www.sorgrollstuhltechnik.de/download-portal

Mountainwheels 24“

Title	Article-N°	Price
☐ Mountainwheel drive wheels 24“ with **standard** hub, incl. aluminum handrim, black	N° 212490	**310,- €/P**
☐ Mountainwheel drive wheels 24“ with **drum brake** hub, incl. aluminum handrim, black ***Only in combination with drum brake N°220036 (additional charge)*** ***Package price for Mountainwheel wheels including drum brakes and brake levers for accompanying persons: €640/pair***	N° 222490	**310,- €/P**

Tyres and options for Mountainwheels

Title	Article-N°	Price
☐ Pneumatic tyres 24x1,75 (ETRTO 47-507) for Mountainwheels, black (studded profile / for offroad use) [1]	N° 201045	**0,- €**
☐ Pneumatic tyres 24x2 (ETRTO 50-507) **Big Apple** for Mountainwheels, black (flat ribbed profile / wider contact surface) [2]	N° 201046	**0,- €**
☐ **Wheel cover LONG for 24“ Mountain wheels. Coverage 6 cm.** [3]	N° 521001	**230,- €/P**
☐ **Wheel cover SHORT for 24“ Mountain wheels. Coverage 6 cm.** [4]	N° 521101	**228,- €/P**

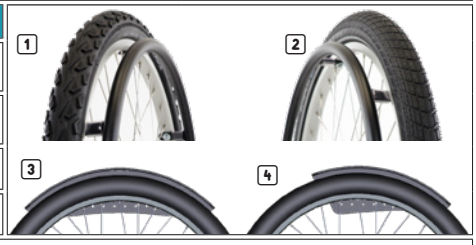

Note: - only the included aluminum handrims are available for mountainwheels.
- cannot be combined with other handrim options.
- no run-flat tyres

Double handrim

with drum brake hub	with standard hub	☐ handrim for opposite side	Distance of double handrim
Mounting ☐ left ☐ right	Mounting ☐ left ☐ right		☐ standard 18mm (..11) ☐ tight 9mm (..12) ***Distance tight:*** ***Not in combination with hand rim cover or coated hand rim***
N°2615 **1.225,- €**	N°2614 **1.115,- €**	N°261435 **155,- €**	N°26.. **0,- €**

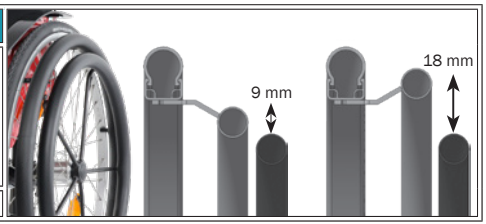

Hand rims (Not for wheels with profile handrims)

Standard hand rim (Please choose type of installation AND material)

Mounting type:
☐ Standard / tight
☐ Standard / wide
☐ High / tight
☐ High / wide
} **Not possible on lightweight wheels with drum brakes.**

Material:
☐ Stainless steel (..01)
☐ Alu, silver anodised (..75)

N°30.. **0,- €**

Hand rim assembly Standard / tight



Hand rim assembly High / tight



Hand rim assembly Standard / wide



Hand rim assembly High / tight



Mounting very closely to rim

☐ Handrims mounted very closely to rim, reduces the risk of finger injuries

Only for standard wheels and in aluminum

N°3015 **CPD 150,-€**

PVC

☐ Hand rim coated with black PVC, (*Tetra Grip*)

N°33.. **376,- €/P**

Ergonomic

☐ Hand rim with ergonomic hand rim profile, black anodised with integrated rubber grip

Only for 24“

N°342424 **430,- €/P**

Maxgrepp ORIGINAL

☐ Hand rims with a soft foam rubber coating.
Suitable for quadriplegics and wheelchair users with weakened hand function.

N°341501.. **460,- €/P**

Maxgrepp ERGO-PARA

☐ Hand rims for pushing with heel of the hand (soft surface)

N°34.. **490,- €/P**

Design hand rim

☐ Aluminum hand rims coated in frame colour

colour number: _____

The colour numbers can be found next to the frame colours on page 1.

Without specifying a colour number, the selected frame colour is used for coating.

Anodised colours only possible in the design package.

N°303000 **TD 92,-€/P**

Hand rim options

Silicone cover for STANDARD hand rim

Detachable silicone cover, black (soft surface),
☐ for standard wheel (..20-24)
☐ for lightweight wheel (..05)

N° 32.. **156,- €/P**

Silicone cover for DOUBLE hand rim

Detachable silicone cover, black
☐ for inside rim
☐ for outside rim
☐ for opposing side

Not in combination with double handrim distance tight N°2612

N° 3205 **78,- €/Pcs**

PVC cover for double hand rim

☐ Handrim coating for double handrim, both handrims (inside and outside), coated with black PVC

N° 262402 **360,- €**

☐ Handrim coating for opposing side of the double handrim, coated with black PVC

N° 262401 **200,- €**

To see the latest versions of our order forms, please visit www.sorgrollstuhltechnik.de/download-portal

Spoke cover Not available with mountain wheels

Transparent

☐ transparent (..00)

Only for wheelsize 20“-24“

N° 25.. **175,- €/P**

Design spoke covers Only for wheelsize 20“-24“. Not available with mountain wheels

Design spoke covers Please specify the desired model of the corresponding manufacturer:

☐ **www.speichen-schutz.de**
_____

N°25..26 **TD 184,- €**

☐ **www.wheelchairgadgets.com**
_____

N°25..27 **TD 184,- €**

Caster wheels

Standard PU

Polyurethane, black:
☐ **5“** N°281515 Width 26mm
☐ **6“** N°281516 Width 26mm

☐ **5“** N°281505 Width 37mm
☐ **6“** N°281506 Width 37mm

Example:

0,- €

Design PU

Polyurethane, transparent, with LEDs:
☐ **5“** N°282005 Width 25mm

Example:

0,- €

Standard pneumatic

Pneumatic, grey:
☐ **6“** N°280006 Width 30mm
☐ **7“** N°280007 Width 40mm

Example:

0,- €

Standard solid rubber

Solid rubber, grey:
☐ **5“** N°281005 Width 40mm
☐ **5,5“** N°281055 Width 40mm
☐ **6“** N°281006 Width 32mm
☐ **7“** N°281007 Width 35mm

Example:

0,- €

Design solid rubber

Solid rubber, black, with alu rim
☐ **5“** N°283905 Width 35mm
☐ **6“** N°283906 Width 35mm

Example:

0,- €

Caster forks

Standard aluminum

☐ Alu fork, black anodised

N° 2826 **0,- €**

Design aluminum

☐ Aluminum fork coated in frame colour

colour N°: _____

The colour numbers can be found next to the frame colours on page 1. Without specifying a colour number, the selected frame colour is used for coating. Anodised colours are only available as part of the design package.

N° 2829 **TD 80,- €/P**

Caster wheels options

Track fixation

☐ Caster wheel track fixation (straight)

N° 2851 **180,- €/P**

Locking

☐ Locking mechanism for track fixation

N° 2850 **220,- €/P**

Hemi-Adapter

for lower seat heights

☐ Reduction of the seat height by 2.5 cm

Not in combination with Steering and pushing aid

Not in combination with 24“ wheels

N° 280540 **150,- €/P**

Frame options

Anti-tipper

Swing-away installation mounting
☐ left
☐ right
☐ pair

N°7215 **150,-€/Pcs**

Steering and pushing aid

☐ Steering and pushing aid, adjustable in width and length, facilitates significantly active and passive driving on soft or rough surfaces, incl. mounting aid

N° 599520 **CPD 495,- €**

Splash guard

☐ Splash guard for Steering and pushing aid, made of plastic

N°59951212 **CPD 85,- €**

Step tube

Mounting
☐ left ☐ right
☐ pair

N°7400 **78,- €/Pcs**

Wheel base extension

☐ Wheel base extension 9,5cm

N°7676 **330,- €**

Sun shade



Removable sun shade. Easily adjustable in height and position by flexible holder.

☐ Size 1 **(only up to SW38)** variably adjustable sun shade, in black

Usable height (from the top edge of the seat plate/seat cover to the apex) = selected back height + 45 cm

Example: BH 30 + 40 cm = 70 cm

N°910301 **TD 259,- €**

☐ Size 2 **(just from SW40)** variably adjustable sun shade, in black

Usable height (from the top edge of the seat plate/seat cover to the apex) = selected back height + 60 cm

Example: BH 30 + 55 cm = 85 cm

N°910302 **TD 299,- €**

☐ Extension set

Increasing the usable amount of the Sun shade by 14 cm.

N°910305 **TD 60,- € / Set**

To see the latest versions of our order forms, please visit www.sorgrollstuhltechnik.de/download-portal

Therapy tables *Arm pads required*

Article name	Article-N°	Price	Variation examples
Mounting Variation 1: hinged sidewards, adjustable in height and distance At variation 1 please select the mounting side: ☐ left ☐ right			
☐ Therapy table, acrylic glass, transparent, Variation 1 **Sz. 1** (45 x 36 cm)	N° 920410		
☐ Therapy table, acrylic glass, transparent, Variation 1 **Sz. 2** (59 x 45 cm)	N° 920411	**355,- €**	
☐ Therapy table, acrylic glass, transparent, Variation 1 **Sz. 3** (70 x 50 cm)	N° 920412		
☐ Therapy table beech wood, Variation 1 **Sz. 2** (50 x 40 cm)	N° 920413	**375,- €**	
☐ Therapy table beech wood, Variation 1 **Sz. 2** (60 x 50 cm)	N° 920414		
Mounting Variation 2: adjustable in height and distance, plugged under arm rests on both sides.			
☐ Therapy table, acrylic glass, transparent, Variation 2 **Sz. 1** (45 x 36 cm)	N° 920710		
☐ Therapy table, acrylic glass, transparent, Variation 2 **Sz. 2** (59 x 45 cm)	N° 920711	**355,- €**	
☐ Therapy table, acrylic glass, transparent, Variation 2 **Sz. 3** (70 x 50 cm)	N° 920712		
☐ Therapy table beech wood, Variation 2 **Sz. 2** (50 x 40 cm)	N° 920713	**375,- €**	
☐ Therapy table beech wood, Variation 2 **Sz. 2** (60 x 50 cm)	N° 920714		

Standard head rests Measures in mm (all measures ± 10mm)

Article name		Article-N°	Price
☐ Standard head rest model 1 (shell-shaped small) including connection to stabilizer bar	1	N° 686021	
☐ Standard head rest model 3 (curved small) including connection to stabilizer bar	2	N° 686023	**330,- €**
☐ Standard head rest model 4 (curved large) including connection to stabilizer bar	3	N° 686024	
☐ Headrest cover, washable and changeable made of Trevira fabric **Please specify a colour and the two-digit colour number** **(see page 3 at colour choice of upholstery fabrics Trevira.** **If no colour is specified, the colour of the seat / back cushions is used.** Colour and Colour number: Rear view Example:  Front view		N° 686050	**99,- €**
☐ Head rest holder for mounting on stabilizer bar for example for mounting headrests from other manufacturers **Only select for non-SORG headrest** 		N° 68600890	**44,- €**

1 Model 1

2 Model 3

3 Model 4

To see the latest versions of our order forms, please visit www.sorgrollstuhltechnik.de/download-portal

Lateral support

- When lateral supports are fitted, the forward folding function of the backrest cannot be used or can only be used to a limited extent.
- From BH 30 with extendable push handles / from BH 35 with standard push handles.

Article name		Article-N°	Price
Pad for pad holder Size 1			
☐ Pad **10 x 7 cm** (incl. cover)	10x7cm	N°68590104	**CPD 118,- €/P**
☐ Pad **10 x 9 cm** (incl. cover)	10x9cm	N°68590105	
☐ Pad **12 x 9 cm** (incl. cover)	12x9cm	N°68590106	
Pad for pad holder Size 2			
☐ Pad **12 x 9 cm** (incl. cover)	12x9cm	N°68590206	**CPD 118,- €/P**
☐ Pad **15 x 10 cm** (incl. cover)	15x10cm	N°68590204	
☐ Pad **18 x 13 cm** (incl. cover)	18x13cm	N°68590205	
Lateral support holder, ADJUSTABLE			
☐ Adjustable holder for lateral support, **incl. linkage and protective cover** **Without pads** **Length difference of the holder size 1 to size 2 is about 4.5 cm**	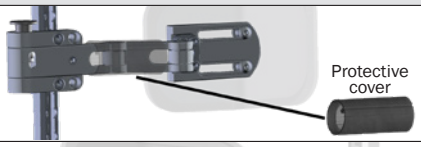 Protective cover	N°68590200	**CPD 432,- €/P**
☐ Extension joint for foldable pad holder Extension for: Holder Size 1 (3,8cm) Holder Size 2 (5,5cm) **Required for ERGO system**	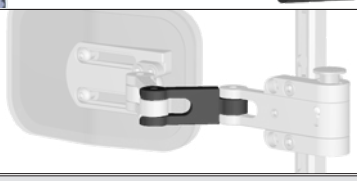	N°68590115	**CPD 124,- €/P**
Lateral support holder, FIX			
☐ Screwed lateral support holder, **incl. linkage** **Without Pads** **Length difference of the holder Size 1 to size 2 is about 4.5cm** **Only in combination with ERGO-System** **Adjustable in height**		N°68591000	**CPD 132,- €/P**

Positioning belts

Article name		Article-N°	Price
☐ 2-Point pelvic belt with PLASTIC fastener, incl. mounting material for self attachment	1	N° 780590	**142,- €**
☐ 2-Point pelvic belt with METAL fastener, incl. mounting material for self attachment	2	N° 780591	**158,- €**
☐ 4-Point pelvic belt with PLASTIC fastener, incl. mounting material for self attachment	3	N° 780592	**184,- €**
☐ 4-Point pelvic belt with METAL fastener, incl. mounting material for self attachment	4	N° 780593	**199,- €**
☐ Protection cap for pelvic belt with metal fastener (see N°780591 oder N°780593) **Makes independent opening by the user difficult.**	5	N° 78050210	**22,- €**
☐ Chest-shoulder belt without zipper, incl. mounting material for self attachment	6	N° 781010	**199,- €**







To see the latest versions of our order forms, please visit www.sorgrollstuhltechnik.de/download-portal

Upper Belt holder

at SORG head rest

☐ at configuration with **SORG headrest** (page 9)
for attaching positioning belts, incl. connection for square tube

A headrest with a square tube is required to install the belt holder

N° 780130 **95,- €**

at Non-SORG head rest

☐ at configuration with **Non-SORG headrest**
for attaching positioning belts, incl. connection for stabilizer bar

Belt holder is included loose with the wheelchair delivery.

N° 780140 **135,- €**

Lower belt holder

for seat plate

☐ for the attachment of 2-point/4-point and/or chest-shoulder belts.



Application example
Illustration similar

N° 782000 **73,- €**

Abduction wedges

Article name	Article-N°	Price
☐ abduction wedge, incl. holder and pad, **Size S**	N° 1952	
☐ abduction wedge, incl. holder and pad, **Size M**	N° 1953	**215,- €**
☐ abduction wedge, incl. holder and pad, **Size L**	N° 1954	
☐ Holder for abduction wedge **(without pad)**	N° 1951	**170,- €**

Size	Length (L) (mm)	Width (B) (mm)	Height (H) (mm)
S	94	65	90
M	110	82	95
L	125	90	100

Dimensions ± 5%

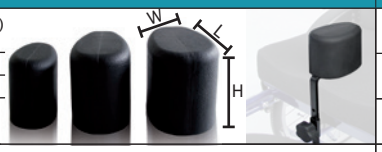

Foot fixation

Article name	Article-N°	Price
☐ with Velcro/fleece fastener and guide roller, **Size 1**	N° 781201	
☐ with Velcro/fleece fastener and guide roller, **Size 2**	N° 781202	**199,- €**
☐ with Velcro/fleece fastener and guide roller, **Size 4**	N° 781203	

Size	Length L
1	15-20 cm
2	19-23 cm
4	24-28 cm

Transport brackets

Compatibility with electrical drive systems or Steering and pushing aid

Please tick appropriate box if number N°58507610 was selected
(Without tipping an appropriate box, delivery will be without compatibility to Steering and pushing aid):

☐ **Steering and pushing aid** (transport brackets at the front)
☐ **Neither**

Transport brackets must be replaced by a subsequent fitting of an Steering and pushing aid

Transport brackets

☐ **Transport brackets (4 pieces)**
for transportation in a handicapped accessible passenger car

CRASH TESTED ISO 7176-19

N°58507610 **CPD 390,-€**

Electric drives and systems

Recommendations	Provider	Information
1. For all possible drives and systems we recommend casters of 6“ or higher. 2. Please regard the respective **mounting possibilities and specifications** given on the home-pages indicated on the right	for example **www.aat-online.de** **or** **www.alber.de**	**Restrictions and adjustments to the installation and the final configuration of the wheelchair are the responsibility of the providers of the additional systems.**

External dimensions Loop SORG RS:

All measurements +-5%

Overall width = Seat width (SW) + 28 cm, with drumbrake
Attention: Attaching the transport brackets increases the overall width by 2 cm

Overall length = 87 cm up to max. 107 cm
(depending on the size and position of the drive wheel and the type of leg supports)

To see the latest versions of our order forms, please visit www.sorgrollstuhltechnik.de/download-portal

Abbreviations:

piece - pcs
pair - P
Trade discount - TD
configuration - cf.
seat width - SW
seat depth - SD
back height - BH
lower leg length - LLL
customized product discount - CPD
Additional charge - AC

Notes:

To see the latest versions of our order forms, please visit www.sorgrollstuhltechnik.de/download-portal

Terms and conditions

1. Preface and Scope
(1) Our terms and conditions apply exclusively. Any deviating, opposing, or complementing terms and conditions on the part of the business partner do not form integral part of contract unless explicitly approved of by us. There are no exceptions to the consent requirement, which also applies in cases where we conduct deliveries without restrictions while aware of the business partner's terms and conditions.
(2) Agreements made in the individual case with the purchaser (including side-agreements, supplements, and alterations) always take priority over these terms and conditions. A contract or our confirmation - both in written form - are authoritative for the content of such arrangements.
(3) Any legally relevant declarations and notifications the purchaser submits to us after conclusion of the contract (e.g. setting of deadlines, notice of defects, declarations of rescission or abatement) require the written form to be valid.
(4) Any information on the application of legal regulations serves the mere purpose of clarification. All regulations are legally binding without any such clarifications unless explicitly altered or excluded in these terms and conditions.

2. Prices
All prices are ex works, excluding insurance and packaging. The prices are net prices; the value-added tax is stated and charged separately according to the legally binding rate at the time of invoicing. The prices valid on the day of delivery are binding unless explicitly arranged otherwise.

3. Conclusion of Contract
SORG's offers are invitatio ad offerendum (invitations to treat). Ordering goods counts as an obligatory offer of contract on the part of the purchaser. Unless the order suggests otherwise, we have the right to accept this contract offer within two weeks time after reception. The acceptance of an offer of contract is effected by the confirmation of the order.

4. Terms of Payment
(1) Provided that no other agreements exist, payment is to be made by paying in advance –50% at placing of order, 50% pre-delivery of goods. The purchaser bears any costs arising from transactions or discounting.
(2) If a 30-day payment deadline is exceeded, a delay rate of 9% on top of the respective base rate of the European Central Bank falls due without the need for prior notices. Beyond that, the purchaser is charged 3,- € for any reminder sent. We reserve the right to make use of the commercial due rate according to § 353 HGB. A higher damage for delay may be enforced via a suitable verification.

5. Offers and Validity
All current price lists are generally valid until December 31 of the respective year, or until new price lists are published. The latest version of the price list will always be provided on our homepage. Offers older than 3 months at that point expire and must be replaced with new offers and prices.

6. Time of Delivery and Delay
We state the terms of delivery when accepting the order. The delivery date is non-binding and has mere guideline value - especially with regard to customised products. The terms for delay in delivery are defined by legal regulations. In any case, a writing notice issued by the purchaser is necessary for them to take effect.

7. Force Majeure (Act of God)
(1) SORG is not to be held responsible for the following delays of delivery. This also applies if these causes occur with respect to legal representatives, auxiliary persons, or deliverers of SORG: Circumstances of force majeure as well as other extraordinary events that are unpredictable and unavoidable for, and not caused by, SORG, and that only occur after ordering or reserving, and that SORG could not have known about. Moreover, this applies in case of strikes, fire, floods, labour disputes, business disruptions, altered magisterial approbation and legal situation, and magisterial orders which are not due to operational risks.
(2) In the cases of paragraph 1, SORG is eligible to delay delivery/performance for the time of hindrance as well as an appropriate start-up time. If SORG thus causes unacceptable complications for the purchaser, both SORG and the purchaser are eligible to withdraw from the contract. Circumstances that only lead to a temporal and hence acceptable delay of delivery and performance are excluded from this right. The legal rights of the client remain unaffected.

8. Dispatch
We generally dispatch uncovered by insurance and at the recipient's risk. We transfer the risk of coincidental loss or deterioration of the goods as well as delay on to the client at the moment of passing the goods on to the forwarder, bearer, or any other person/institute responsible for delivery. SORG will make any effort to respect the client's wishes in terms of path and kind of delivery. Any costs caused by this (including agreed carriage free delivery) are to be covered by the client. In the case of carriage free delivery conducted by SORG, the recipient is required to put forward any carriage costs for a refund. If the client wishes the dispatch to be delayed, any risk of loss or deterioration of the goods is carried by the recipient from the first day of readiness for dispatch. The goods dispatched are only insured upon special demand and at the cost of the recipient.

9. Damage through Delivery
Upon delivery, the goods need to be checked for obvious damage in the presence of the bearer. Any damage is to be documented in a written form and co-signed by the bearer. This protocol is to be forwarded to us immediately. Delayed reclamations, or reclamations not signed by the bearer, cannot be taken into account.

10. Warranted Features, Receipt, and Technical Alterations
Delivered objects, even with minor damage, are to be accepted by the client, even if §433 paragraph 1 BGB is not fulfilled. Partial deliveries are permissible. Features only count as warranted if explicitly designated as such. A warranty of condition can only be asserted explicitly and in a written form. SORG reserves the right for technical alterations, especially for solutions of equal or higher value.

11. Warranty for Defects
(1) SORG warrants for any defects of delivered new goods for 12 months as long as the purchaser is not the user (§§ 474, 13 BGB). Should the purchaser be the user then the warranty period is two years for new goods, for used goods 12 months. Should the purchaser also be an entrepreneur, then the liability for used items is void, as long as there is no claim for compensation according to N°12.
(2) The purchaser's claim for defects presuppose that he has attended his obligation to give notice of defects on the legal grounds for his reasons of inquiry (§§ 377, 381 HGB). If defects are found during the inspection or at a later point, we are to be notified in writing without delay. The notice counts as not delayed if issued within two weeks. Posting the notice on time suffices for the keeping of the term. Independently from this obligation to inspect and give notice, the purchaser is to report obvious defects (including wrong and short delivery) within two weeks upon delivery (again, posting the notice on time suffices). If the purchaser misses the proper inspection and/or notice of defects, we do not warrant for the reported defects. If the delivered good is defected, we may choose to conduct supplementary performance either by repairing the defect (subsequent improvement) or by delivering flawless goods (compensation delivery). Our right to refuse the chosen method of supplementary performance on the respective legal grounds remains untouched.
(3) Our liability for defects expires when alteration or maintenance works are done by the client or a third-person-party without our prior written permission. Consequences of excessive strain, negligent or incorrect handling, and violent damage are excluded from the warranty for defects.
4) Liability for defects is excluded if these are wearing parts. Included here for example are damper elements, textile parts, wheels and brake parts.
(5) Additional regulations can be found in our service booklet or instructions for use.

12. Further Liability
(1) With respect to compensation - regardless of the legal cause - SORG is only liable in case of malice and act of gross negligence. In case of slight negligence, SORG is only liable for damage of life, body, health, and for damage caused by the negligence of an essential contractual obligation (an obligation whose fulfilment make the proper realisation of the contract possible in the first place and in whose fulfilment the contract partner regularly trusts and can trust). In this case, however, our liability does not exceed the covering of predictable, typically occurring damage.
(2) A free right to termination on the part of the purchaser (acc. to § 651, 649 BGB in particular) is precluded. Otherwise, the usual prerequisites and legal consequences apply.

13. Costs of Supplementary Performance
Costs of supplementary performance cannot be charged on SORG's account.

14. Voluntary Withdrawal of Goods
SORG is not obliged to take back any delivered end products or parts thereof. If SORG voluntarily decides otherwise in individual cases (especially for therapeutically altered requirements or deaths), SORG refunds a maximum of 75% of the delivery costs for unused parts whose delivery does not date back more than three months. There is no legal obligation concerning withdrawal in this respect. Deliveries which date back more than three months as well as sewed parts and customised products are not returnable. A copy of the delivery note or the bill serves as proof of age of delivery.

15. Reservation of Ownership
Goods delivered by SORG remain the property of SORG until any obligations from the parties' business contract on the part of the purchaser have been redeemed. This also applies if SORG has adapted individual or all claims into a running account which has been balanced and acknowledged. The purchaser has the right to dispose of the goods in the proper course of business. The purchaser hereby yields all claims to SORG which arise from the resale against the purchaser or third parties. The purchaser is authorised to withdraw these claims even upon conveyance. SORG's right to withdraw the claims remains untouched. However, SORG is obliged not to withdraw the claims as long as the purchaser complies with his duty of payment and any other duties. SORG has the right to demand that the purchaser makes known the yielded claims and their debtors, that he provides all information necessary for conveyance, and that he hands in all associated documents. As long and insofar the reservation of ownership is intact, the purchaser must not transfer any goods for securing or bailment without SORG's permission. The purchaser may process or alter the goods for the benefit of SORG exclusively. If processed with other goods which do not belong to SORG, SORG obtains co-ownership of these new goods in relation to the invoice value to the cost price of the other processed goods. If a third party interferes with SORG's ownership, the purchaser is to notify SORG immediately. The purchaser must not make any agreements with other purchasers which may exclude or limit SORG's rights. In particular, the purchaser must not make any agreements which destroy or limit the advance assignments to SORG. If the estimated value of the existing guarantees exceeds the claims to be ensured by more than 20%, SORG is insofar obliged to release by request of the purchaser.

16. Copyright Protection
If SORG conveys any images, drawings, indications of weight or measurements, technical documentations, or other product descriptions and documents (including electronic ones), the respective indications only apply if explicitly stated that they do. SORG reserves ownership and copyright of all these documents. They may only be made available to third parties upon SORG's explicit permission.

17. Data Protection
(1) Both SORG and the Buyer are responsible for compliance with data protection regulations.
(2) The Buyer warrants that personal data transmitted to SORG for the purpose of fulfilling the contract was collected in compliance with data protection regulations and that SORG is authorized to process this data for the purpose of providing the service. This applies in particular to health data pursuant to Art. 9 (1) GDPR.

18. Place of Fulfilment, Place of Jurisdiction, and Severability Clause
(1) The law of the Federal Republic of Germany applies for these Terms and Conditions and all legal relations between us and our business partners. All international and supranational (contractual) legal systems, the UN Convention on Contracts for the International Sale of Goods in particular, are hereby excluded. Prerequisites and effects of the reservation of ownership acc. to no. 15 are subject to the right of the respective storage location of the good if the choice of law made in favour of the German law is illegitimate or ineffective. The only place of jurisdiction (also on an international basis) for any disputes arising directly or indirectly from the contractual relationship is, according to German Commercial Code, our office in Oberhausen-Rheinhausen, Germany. However, we also have the right to file a suit concerning the general jurisdiction of the purchaser.
(2) If any clause in these Terms of Conditions should turn out to be ineffective, this does not affect the effectiveness of all other clauses.

Technical alterations and misprints reserved. As of: October 2025
SORG Rollstuhltechnik GmbH + Co. KG
Benzstr. 3-5, 68794 Oberhausen-Rheinhausen / Germany
Phone +49 7254 / 9279-0
Fax +49 7254 / 9279-10
info@sorgrollstuhltechnik.de, www.sorgrollstuhltechnik.de

To see the latest versions of our order forms, please visit www.sorgrollstuhltechnik.de/download-portal